



DC/DC 2.5kW

Adjustable DC/DC converter



22/44 VDC to 44/120VDC
Parallel operation from 1 to 4 modules
Forced air cooling

Connection

Bus CAN: CAN 2.0B - 1 Mb/s
Power terminals : M5

External power supply

24 VDC/ 1 A via RJ45 connection


 188*100*75 mm

 1.1 kg

 2.5 kW

 -20 to 45 °C

 Tropicalized

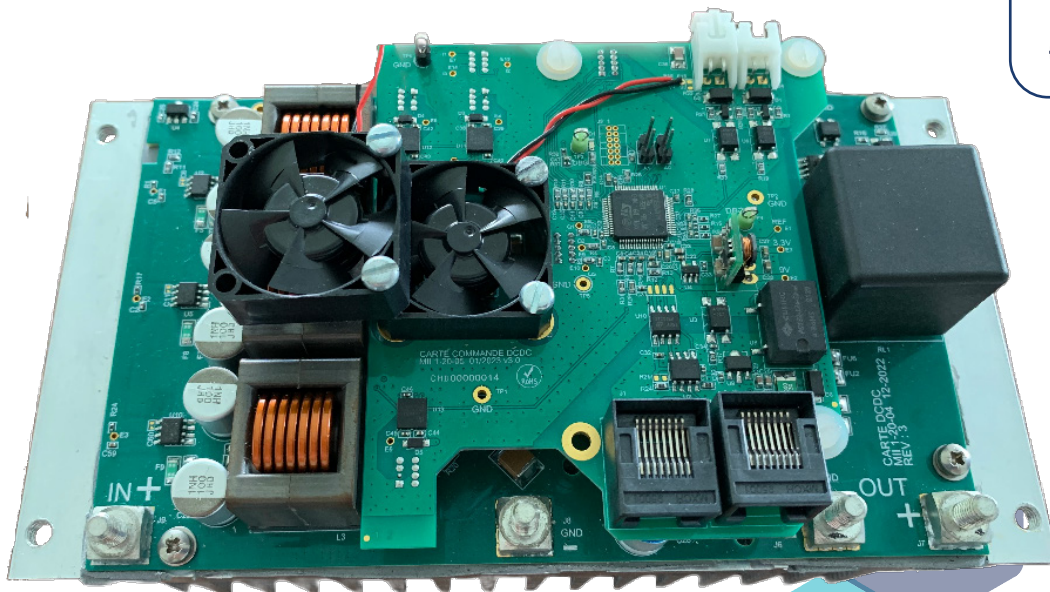

Inputs

Input voltage :
22VDC- 44VDC
Max input current : 125 A

Outputs

Output voltage : 44VDC- 120VDC
Max output current: 60A
Output power : 0-2.5kW
Efficiency : > 95%



MADE IN
FRANCE

© H2X-ECOSYSTEMS_2025

H2X ECOSYSTEMS
12 rue Marie Curie
29860 BOURG-BLANC
contact@h2x-ecosystems.com
FRANCE +33(0)6 63 00 86 98
www.h2x-ecosystems.com

